



PLASTEC

# PRODUCT SPECIFICATIONS

## PAN CONNECTORS 60MM OFFSET


- High rise reduces the risk siphonage and may need to be recessed into the floor.
- No need to solvent weld, can be pushed into pipe.
- Ensure that the outlet of the WC doesn't come in contact with the base of the Pan Connector body.



ID	⌀	📦
DWV		
14751	100	22

ID	⌀	📦
HDPE		
14757	100	22

Install as per AS/NZS 3500.2

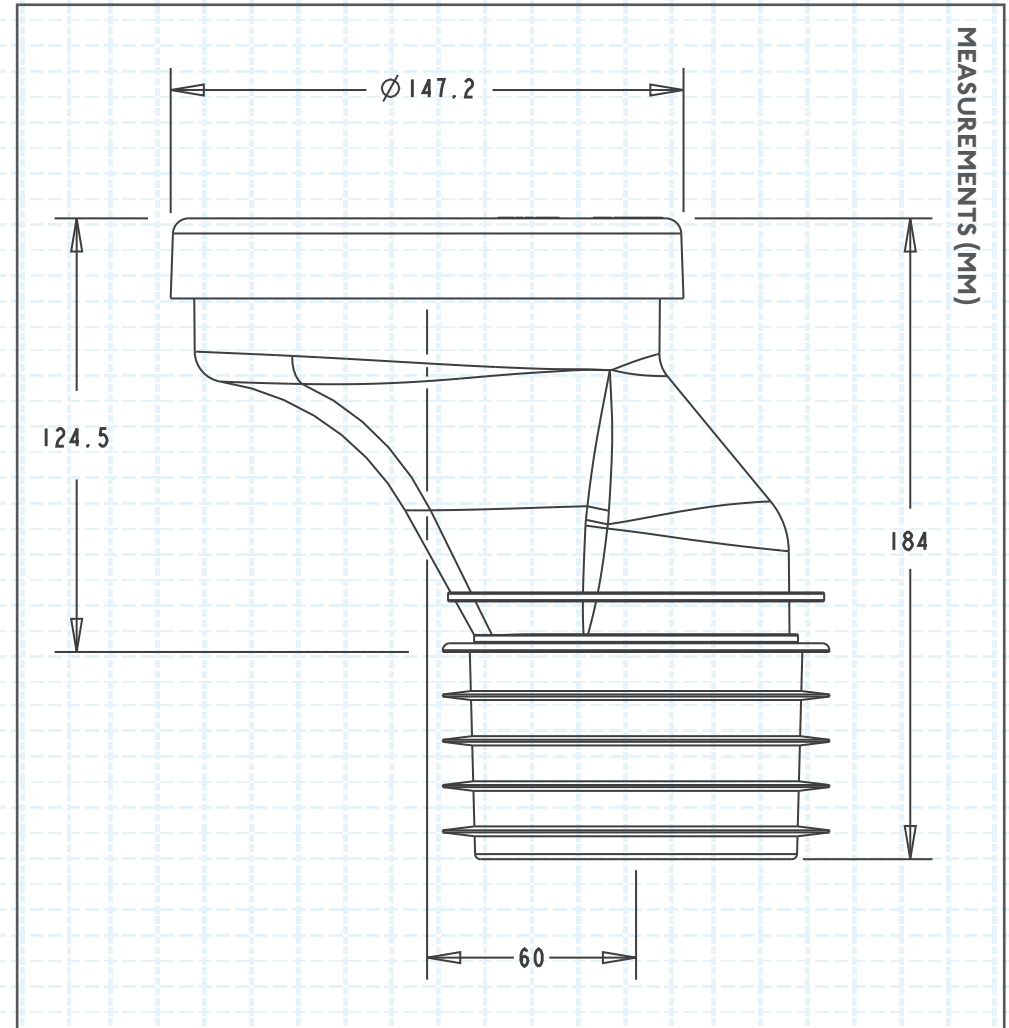

⌀ DIAMETER  
 🔩 FASTENING  
 📦 BAG QTY  
 📦 CARTON QTY  
 🏗️ FINISH/COLOUR  
 📏 MEASUREMENT (MM)

Details correct as at 23.01.18, but are subject to change.

07 5413 4444 - WWW.PLASTEC.COM.AU



WaterMark  
WMTS 517  
239