


ELBOW M/F

Brand Name: **elson**

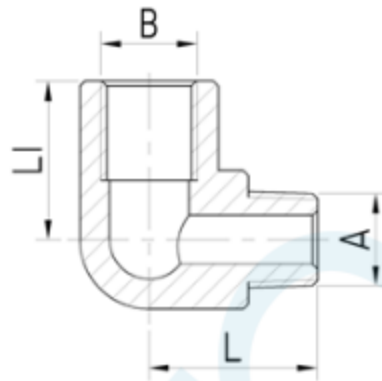

CODE	DESCRIPTION	L(mm)	L1(mm)	A	B
80629	ELBOW M/F 4mm (1/8") BRASS	17	15	R1/8	G1/8
80632	ELBOW M/F 6mm (1/4") BRASS	24.4	19	R1/4	G1/4
80634	ELBOW M/F 10mm BRASS	25.8	20	R3/8	G3/8
80636	ELBOW M/F 15mm BRASS	33.5	27.2	R1/2	Rp1/2
80638	ELBOW M/F 15mm CHROME	33.5	27.2	R1/2	Rp1/2
80640	ELBOW M/F 20mm BRASS	34	30	G3/4B	G3/4
80642	ELBOW M/F 20mm CHROME	34	30	G3/4B	G3/4
80644	ELBOW M/F 20mm FI x 15mm MI BRASS	35	31	G1/2B	G3/4
80646	ELBOW M/F 25mm BRASS	42	45	G1B	G1
80648	ELBOW M/F 32mm BRASS	46	46	R1 1/4	G1 1/4
80650	ELBOW M/F 40mm BRASS	50	50	R1 1/2	G1 1/2
80652	ELBOW M/F 50mm BRASS	61	61	R2	G2

Product Specification & Features

- Maximum Working Temperature: 95°C
- Maximum Working Pressure at 20°C : Water-2000Kpa, Gas-500KPa
- Threads: Complies with AS ISO 7.1, AS ISO 7.2 and AS 1722.2
- Material: DR Brass, Complies with AS 2345
- Suitable for Potable Water – complies with AS/NZS 4020



Elson Australasia Pty Ltd

Tel: 02 9625 7899 Fax: 02 9625 7855

Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0

Nov. 2020