Spring Action Valve Knee Operated Female & Female 15mm

Hands free, knee operated tapware is a self-closing spring action mechanism. Constructed from dezincification resistant (DR) brass with a durable chrome plated finish. Choose from Enware's range of outlets to suit your

application and WELS water efficiency requirements.

BUB268L

FEATURES

- Vandal resistant design
- Self-closing mechanism
- DR Brass construction
- Integral adjustable flow regulator



Product Codes


BUB268L

Straight Lever

Technical Information

Inlet Connection	1/2" BSP Female
Recommended Working Pressure	100- 500 kPa
Flow Rate	2 l/minute (adjustable)
Recommended Temperature Range	5-30 °C

Enware tapware must be installed in accordance with the provisions of AS/NZS3500 and any relevant local regulations. Installations not complying with AS/NZS3500 may void the product and performance warranty provisions. The performance of Enware AS/NZS 3718 tapware, in many cases, exceeds the plumbing system design requirements of the Plumbing Code of Australia and AS/NZS 3500.

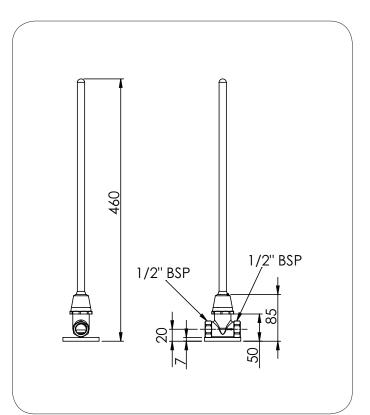



Version: Jun 16

Call 1300 369 273 www.enware.com.au

Enware Australia Pty Limited 9 Endeavour Rd Caringbah NSW 2229 Australia Ph: +61 2 8556 4000 Fax: +61 2 8556 4055 **ENWARE** installing**confidence**