


**ELBOW F/F**

Brand Name: **elson**

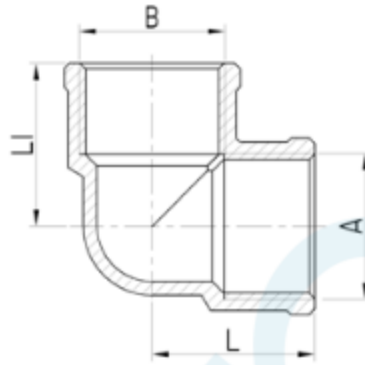

CODE	DESCRIPTION	L(mm)	L1(mm)	A	B
80751	ELBOW F/F 4mm (1/8") BRASS	14.5	14.5	G1/8	G1/8
80754	ELBOW F/F 6mm (1/4") BRASS	19	19	G1/4	G1/4
80756	ELBOW F/F 10mm BRASS	30	30	G3/8	G3/8
80758	ELBOW F/F 15mm BRASS	25	25	G1/2	G1/2
80760	ELBOW F/F 15mm CHROME	25	25	G1/2	G1/2
80762	ELBOW F/F 20mm BRASS	29.5	29.5	G3/4	G3/4
80764	ELBOW F/F 20mm CHROME	29.5	29.5	G3/4	G3/4
80768	ELBOW F/F 25mm BRASS	33	33	G1	G1
80770	ELBOW F/F 32mm BRASS	46	46	G1 1/4	G1 1/4
80772	ELBOW F/F 40mm BRASS	50	50	G1 1/2	G1 1/2
80774	ELBOW F/F 50mm BRASS	61	61	G2	G2

**Product Specification & Features**

- Maximum Working Temperature: 95°C
- Maximum Working Pressure at 20°C : Water-2000Kpa, Gas-500KPa
- Threads: Complies with AS ISO 7.1, AS ISO 7.2 and AS 1722.2
- Material: DR Brass, Complies with AS 2345
- Suitable for Potable Water – complies with AS/NZS 4020



**Elson Australasia Pty Ltd**

Tel: 02 9625 7899 Fax: 02 9625 7855  
 Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0  
 Nov. 2020