


**UNION C×C**

Brand Name: **elson**

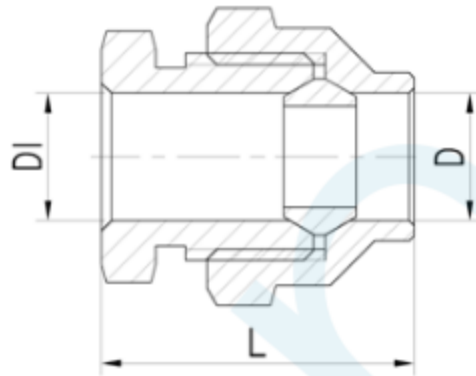

CODE	DESCRIPTION	L(mm)	D	D1
85041	UNION CxC 15mm FL x15mm FL CP	31.7	DN15	DN15
85042	UNION CxC 15mm FL x15mm FL BRS	31.7	DN15	DN15
85043	UNION CxC 20mm FL x20mm FL CP	36	DN20	DN20
85044	UNION CxC 20mm FL x20mm FL BRS	36	DN20	DN20
85045	UNION CxC 15mm FL x20mm FL BRS	37	DN20	DN15
85046	UNION CxC 15mm FL x20mm FL CP	37	DN20	DN15
85048	UNION CxC 25mm FL x25mm FL BRS	37.3	DN25	DN25
85052	UNION CxC 25mm FL x20mm FL BRS	38.7	DN25	DN20

**Product Specification & Features**

- Maximum Working Temperature: 95°C
- Maximum Working Pressure at 20°C : Water-2000Kpa, Gas-500KPa
- Threads: Complies with AS 1722.2
- Material: DR Brass, Complies with AS 2345
- Suitable for Potable Water – complies with AS/NZS 4020

Standards & Approvals



**WaterMark**  
WMKA02497  
Standard AS 3688  
SAI GLOBAL



**Australian Standard**  
Certificate No. SMK 02497  
Standard AS 3688

**Elson Australasia Pty Ltd**

Tel: 02 9625 7899 Fax: 02 9625 7855

Website:www.elson.net.au E-mail:sales@elson.net.au

Version 1.0

Nov. 2020