


**ELBOW C×F**

Brand Name: **elson**

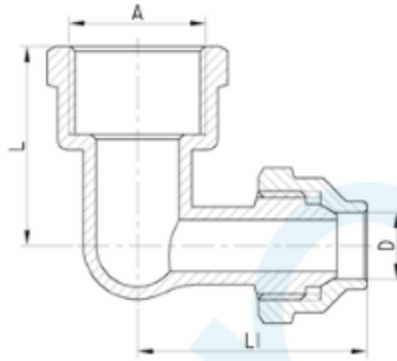

CODE	DESCRIPTION	L(mm)	L1(mm)	D	A
85567	ELBOW C×F 15mm FL x 15mm FI CP	36	39.8	DN15	G1/2
85568	ELBOW C×F 15mm FL x 15mm FI BRS	36	39.8	DN15	G1/2
85569	ELBOW C×F 20mm FL x 20mm FI CP	33.7	48.2	DN20	Rp3/4
85570	ELBOW C×F 20mm FL x 20mm FI BRS	33.7	48.2	DN20	Rp3/4
85572	ELBOW C×F 15mm FL x 20mm FI BRS	38.5	44.3	DN15	G3/4
85573	ELBOW C×F 20mm FL x 15mm FI BRS	32	44.2	DN20	Rp1/2
85576	ELBOW C×F 25mm FL x 25mm FI BRS	54	59.2	DN25	G1

**Product Specification & Features**

- Maximum Working Temperature: 95°C
- Maximum Working Pressure at 20°C : Water-2000Kpa, Gas-500KPa
- Threads: Complies with AS ISO 7.1, AS ISO 7.2 and AS 1722.2
- Material: DR Brass, Complies with AS 2345
- Suitable for Potable Water – complies with AS/NZS 4020



**Elson Australasia Pty Ltd**

Tel: 02 9625 7899 Fax: 02 9625 7855

Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0

Nov. 2020