REMER

ARCH 500D

LED MIRROR

SPECIFICATIONS

WIDTH	500mm
HEIGHT	900mm
DEPTH	35mm
WEIGHT	7kg
ORIENTATION	Portrait

LIGHTING SPECIFICATIONS

CCT	2700K - 6500K
CRI	>80

INSTALLATION

Wall mount

Hardwire

Input voltage: 220-240v 50Hz

FEATURES
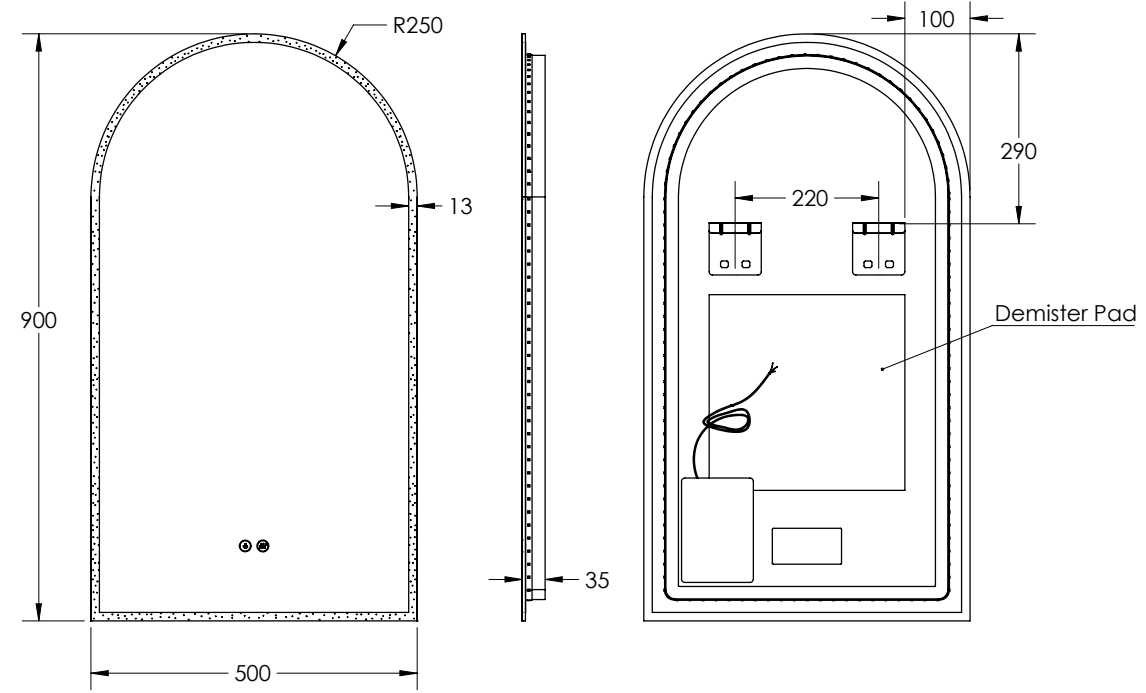
Copper Free Mirror

LED Lighting

(Adjustable Colour Temperature)

Touch Sensor

Demister with 1 Hour Auto Cut-off

R250

13

900

500

35

100

290

220

Demister Pad

IP44

5 YEAR REPLACEMENT WARRANTY

REMER

REMER

ARCH 500D

LED MIRROR

PRODUCT CODE

AR50D

SPECIFICATIONS

WIDTH	500mm
HEIGHT	900mm
DEPTH	35mm
WEIGHT	7kg
ORIENTATION	Portrait

LIGHTING SPECIFICATIONS

CCT	2700K - 6500K
CRI	>80

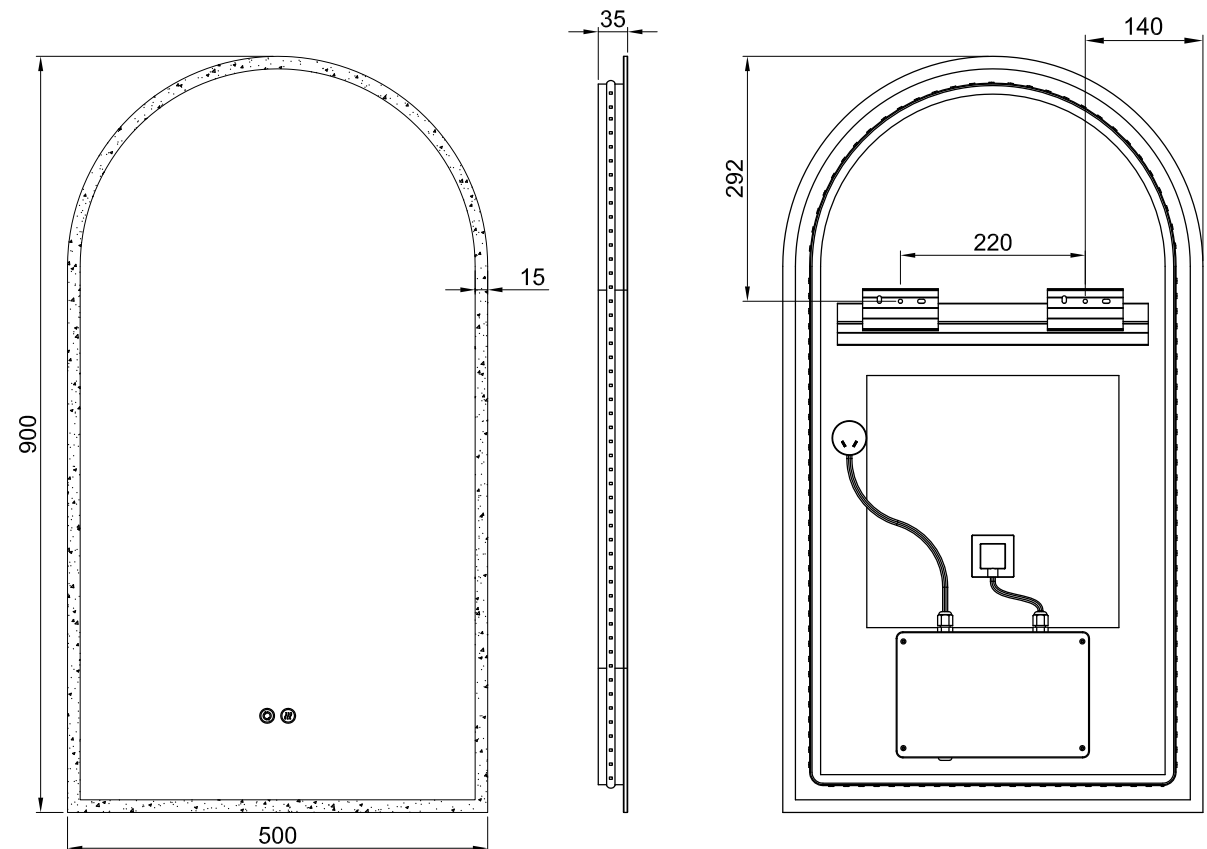## INSTALLATION

Wall mount

Plug or Hardwire

Input voltage: 220-240v 50Hz

FEATURES

Copper Free Mirror

LED Lighting
(Adjustable Colour Temperature)

Touch Sensor

Demister with 1 Hour Auto Cut-off

5 YEAR REPLACEMENT WARRANTY

CE IP44 TÜV

REMER

REMER

ARCH 500D

LED MIRROR WITH ALUMINIUM FRAME

FINISH		PRODUCT CODE
Brushed Brass		AR50D-BB
Brushed Nickel		AR50D-BN
Gun Metal		AR50D-GM
Matte Black		AR50D-MB
Matte White		AR50D-MW
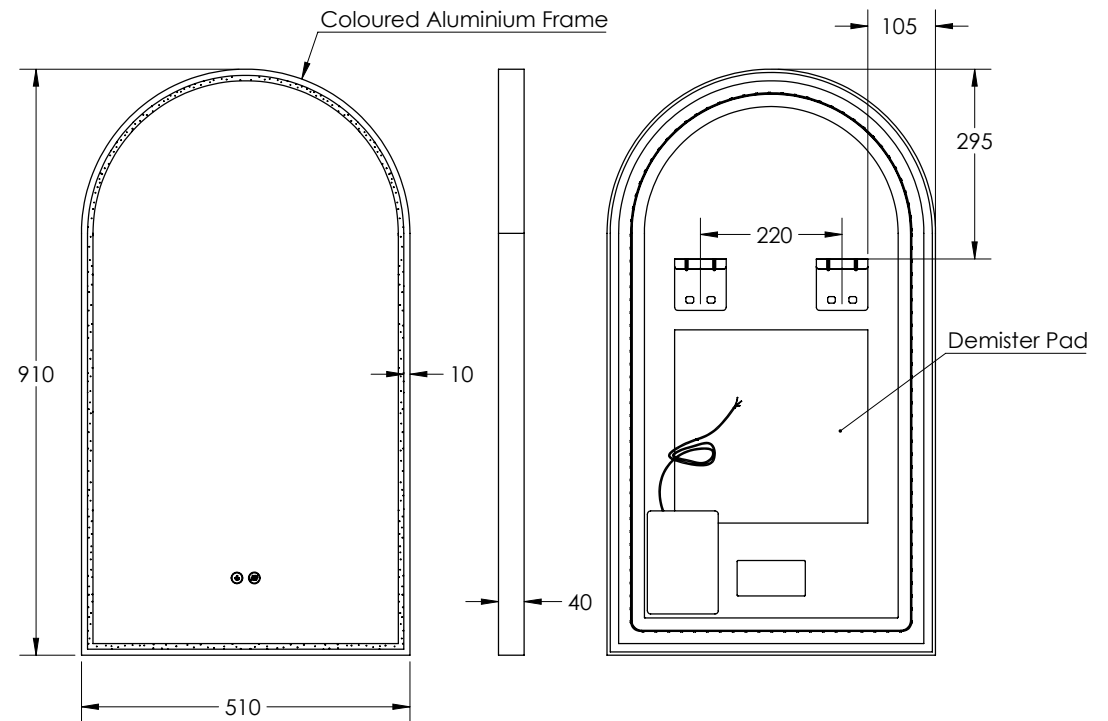
SPECIFICATIONS

WIDTH	510mm
HEIGHT	910mm
DEPTH	40mm
WEIGHT	8kg
ORIENTATION	Portrait

LIGHTING SPECIFICATIONS

CCT	2700K - 6500K
CRI	>80

INSTALLATION

Wall mount

Hardwire

Input voltage: 220-240v 50Hz

FEATURES

Copper Free Mirror

LED Lighting (Adjustable Colour Temperature)

Frontlit

Touch Sensor

Demister with 1 Hour Auto Cut-off

Coloured Aluminium Frame

Demister Pad

105

295

220

910

10

40

510

CE IP44

5 YEAR REPLACEMENT WARRANTY

REMER

REMER

ARCH 500D

LED MIRROR

SPECIFICATIONS

WIDTH	505mm
HEIGHT	905mm
DEPTH	40mm
WEIGHT	8kg
ORIENTATION	Portrait

LIGHTING SPECIFICATIONS

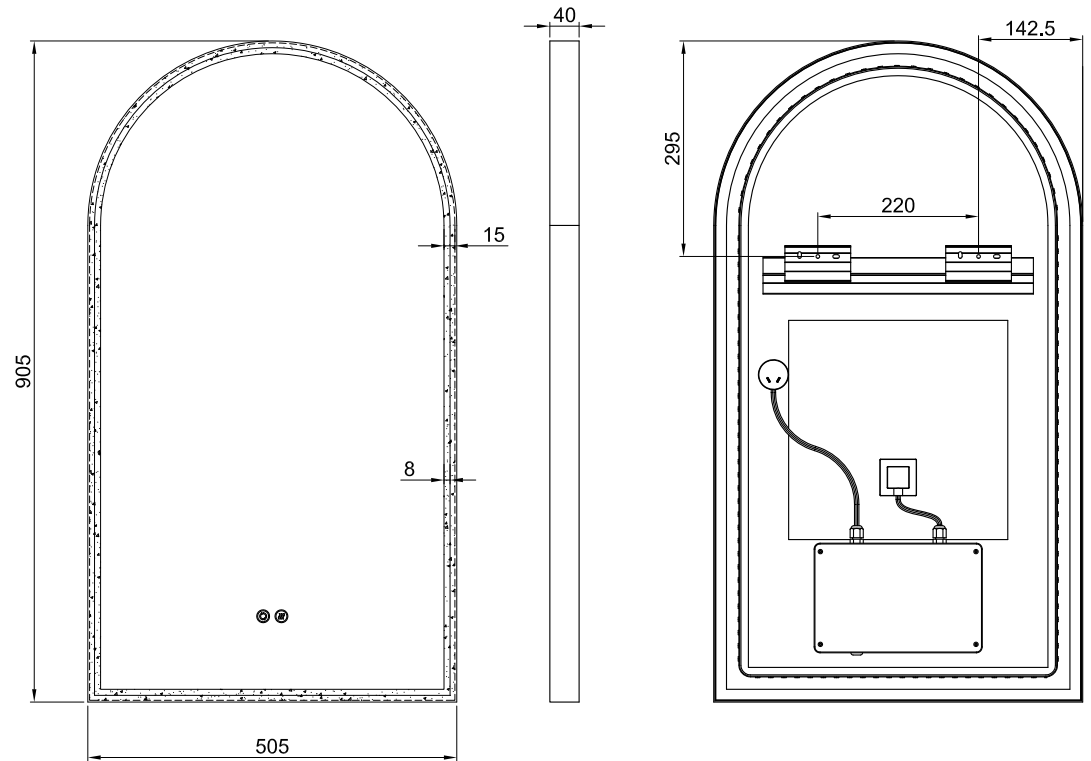|	
CCT	2700K - 6500K
CRI	>80

INSTALLATION

Wall mount

Plug or Hardwire

Input voltage: 220-240v 50Hz

FEATURES

Copper Free Mirror

LED Lighting
(Adjustable Colour Temperature)

Touch Sensor

Demister with 1 Hour Auto Cut-off

FINISH / PRODUCT CODE

FINISH		PRODUCT CODE
Brushed Brass		GAR70D-BB
Brushed Nickel		GAR70D-BN
Gun Metal		GAR70D-GM
Matte Black		GAR70D-MB
Matte White		GAR70D-MW

IP44