Enware-Delabie TempoSoft Time Flow Wall Tap

Time flow, wall mounted basin tap with easy to use soft-push operation. Automatic shut-off for improved hygiene and reduced water wastage.

Purpose designed optional extension piece available for when basin, sink or trough is set further away from the wall than is ideal. Designed to be vandal resistant and integrate cleanly with the standard TempoSoft wall tap.

Ideal for public washrooms, schools, child care and applications where easy activation is beneficial.

FEATURES

- · Soft push activation
- Approximately 7 seconds* flow time
- Automatic shut-off without manual contact
- Hygienic, anti-scale flow straightener outlet
- Vandal resistant design
- Chrome-plated brass body
- Supplied with blue, yellow and red indicators
- 1/2" BSP female inlet connection
- 6 Star Water Efficiency Rating

^{*}Flow times are indicative only and may vary depending on water supply pressure and flow conditions.



TFC74165EXT - Extension piece



Product Codes

TFC741510

7 Seconds* - 6 Star WELS Rating





TFC741510


Technical Information

Inlet Connection	15mm 1/2" BSP
Recommended Working Pressure	250-350 kPa
Operating Working Pressure	80 - 500 kPa
Maximum Water Temperature	50°C


Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models.

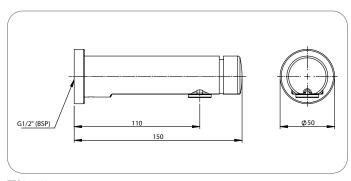

TFC741510



TFC74165EXT


Version: Apr 19

Call 1300 369 273 www.enware.com.au



Enware-Delabie TempoSoft Time Flow Wall Tap

SPARE PARTS

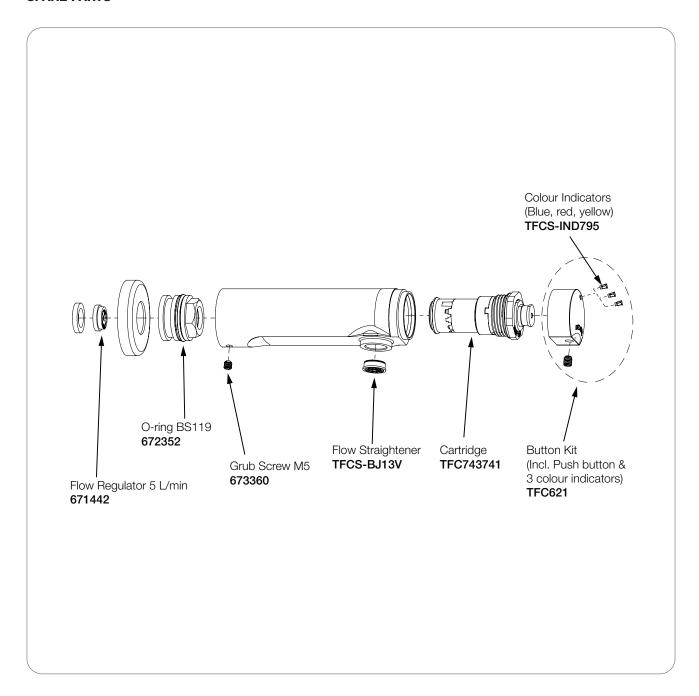

Version: Apr 19

