

Rheem Electric Stellar® SS 315L

4A1315, 4A2315

4 - 6

PEOPLE


Indoor/
Outdoor

INSTALLATION



Features & Benefits

- Stainless steel cylinder and water fittings resist corrosion for longer, extending product life
- Dual handed fittings located on the front of the water heater
- Twin element model- 4A2315
- 17% better performance than MEPS reduces energy use, saving money
- Up to 42% lighter² - for easier handling and installation
- Australian made
- 12 year cylinder warranty¹

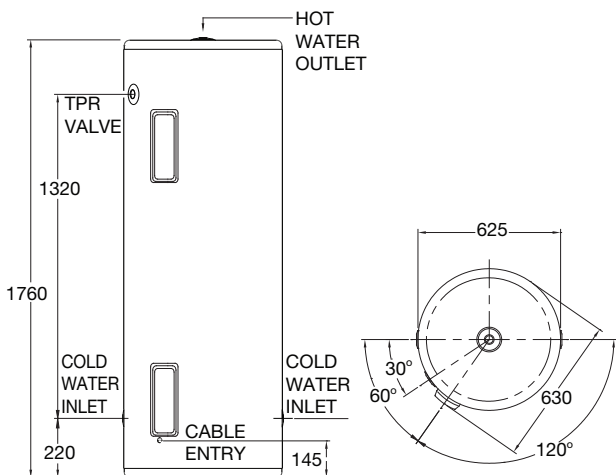

MODEL	4A1315 4A2315
Hot Water Delivery (L)	315
kW Rating	3.6, 4.8
Relief Valve Pressure (kPa)	1000
Expansion Control Valve (kPa)	850
Max Water Supply Pressure:	
with ECV (kPa)	680
without ECV (kPa)	800
Water Connections	Rp 3/4
Approx. Weight (packaged) kg	54



Scan code for
details & installation
instructions

