



**YOUR ENERGY
EFFICIENT
HEAT PUMP
RANGE**

COMES ON STEADY, HOT AND STRONG



INSTALL A

RHEEM MANUFACTURING IN AUSTRALIA FOR OVER 80 YEARS



Rheem has been manufacturing in Australia since 1939. Over time Rheem has grown to become a household name and a part of the fabric of Australian homes. Today Rheem is the largest water heating appliance manufacturer in Australia, offering an expansive range of water heaters including the latest in energy efficient roof mounted and ground mounted solar hot water systems and heat pump water heaters.

OUR COMMITMENT

Rheem is committed to making a difference with the products we create, for the people we serve and through the processes that drive us. We're committed to leading the way in water heating with intelligent products and sustainable solutions that make a difference for you and the planet.

OUR NETWORK

Through Rheem's national network of merchants, distributors, dealers, and installers we offer an extensive product range to suit the needs and aesthetics of your home. The network draws on Rheem's vast experience and expertise in solar water heating to offer you the best solution with a dedicated service network around the country.

IMPROVED PRODUCTS THROUGH R&D

Rheem has always maintained a steady flow of innovation and, as a global leader in heating, cooling and water heating innovation, invests heavily in research and development to continue to lead the way in product development. The latest range of Rheem heat pumps using Low Global Warming Potential (GWP) refrigerants have been developed in-house.

Rheem is committed to developing products using sustainable refrigerants to reduce Green House Gases by using energy efficient, environment friendly Ultra low Global Warming Potential refrigerants.

What is GWP or Global Warming Potential of a refrigerant?

GWP stands for Global Warming Potential. In the context of refrigerants, GWP is a measure of how much heat a greenhouse gas traps in the atmosphere over a specific time, usually 100 years. When released in the atmosphere, they act like a blanket insulating the Earth and have a significant impact on global warming.

How do they benefit the environment?

Lower GWP refrigerants are considered more environmentally friendly as they have a reduced impact. In brief the lower the GWP of a refrigerant used in a Heat Pump - the lesser the impact on our environment.

REFRIGERANT GAS	GWP	
R410	2088	Traditionally used in Heat Pump Water Heaters now replaced with R32
R134a	1430	Traditionally used in most Heat Pumps
R513a	629	Less than half of GWP when replacing R134a
R290	3	An ultra low environment friendly, GWP refrigerant
CO ₂	1	Considered as base line for comparison

OTHER EXPLANATIONS

COP – The Coefficient of Performance for a Heat Pump is the ratio of how much useful heat it produces for water heating to the power input into the water heater. The higher the COP number, the more efficient the Heat Pump is.

Ambient Air Temperature and Humidity – The performance of a Heat Pump changes with ambient air temperature, humidity, and incoming water temperature. The warmer the air temperature, the higher the relative humidity; and the cooler the water temperature, the higher is the heating rate of the Heat Pump. Performance specifications stated in relation to the Heat Pump are measured at predefined conditions during its testing.

+Average Heating Capacity (kW) – This is how much heating power is put into the water during the heating cycle. It is expressed as an average due to the changes in heating power from the refrigeration cycle as the water is being heated and its temperature increases during the heating cycle.


Hot Water Recovery Rate @ 45°C rise (L/hr) – Is the number of litres of water that can be heated through a 45°C temperature rise in one hour, e.g. when the air temperature is 19°C, the Heat Pump can heat 60 litres of water from 15°C to 60°C in one hour.

WHAT ARE HEAT PUMPS AND HOW DO THEY WORK?

Rheem Heat Pump water heaters are an energy efficient, affordable way to heat water. Heat Pumps use the heat from the surrounding air to heat your water and help reduce your water heating energy consumption compared to an electric water heater. They work all year round, day or night, in sunshine or rain and even on cooler days, as there is heat in the atmosphere which can be used.

FEATURES

- No need for solar collectors - perfect where roof space is limited
- Can use the same connections as similar size electric water heater
- Ideal upgrade from a standard electric water heater
- Vitreous Enamel lined tank
- Saves energy compared to an electric water heater
- Includes a back-up element, delivering hot water, for the coldest winter nights

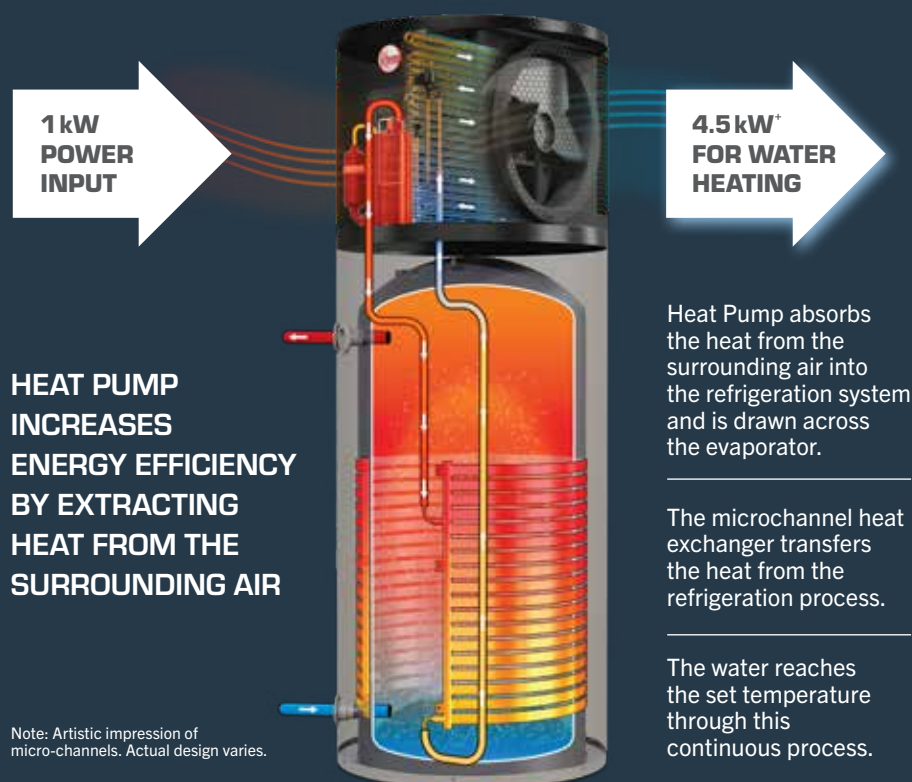

WORKS DAY & NIGHT

Heat Pumps draw heat from the surrounding air to heat the water



RHEEM ULTRANAMEL®

Exclusive coating, protects the cylinder against corrosion



BACK-UP ELEMENT

Provides hot water in very cold conditions



FROST PROTECTION


Suitable for cold and frost climates

ELIGIBLE FOR STCs

PLUS may be eligible for additional State Government rebates and incentives. See rheem.com.au for details.

MEET THE HEAT PUMP RANGE

FROM AUSTRALIA'S
NO.1 IN HOT WATER



The affordable
energy efficient
way to heat water.





For standard Terms & Conditions and product specific information scan QR code at the back.

RHEEM MPI-325 SERIES II HEAT PUMP



Rheem MPI-325 is recommended for replacement of small to medium electric water heaters in Zone 1 to 4.

MPI-325 is an efficient Heat Pump with a powerful boost element making it an ideal choice.

FEATURES

- Multi-pass heating – Heats the water ‘isothermally’ by passing the water through the heat exchanger multiple times
- Constant recovery – Minimises energy use by heating at a ‘constant’, optimised rate
- 3.6 kW boost element for cold weather conditions
- Two piece system configuration allows single plumber installation
- Energy efficient – Can save up to 65% on your water heating energy consumption compared to an electric water heater in Zone 3⁴
- Refrigeration unit below the fence line for lower noise transmission
- LED Display – Enables you to easily check the operating status of the water heater
- Suitable for standard water conditions
- Manufactured in Australia

MODEL		551325
Storage capacity	Litres	325
Boost capacity	Litres	180
Rated Heat Pump power input	Watts	800
Element rating	kW	3.6
Recommended electrical circuit	Amps	15
Coefficient of Performance (COP) ¹		3.6
Recommended people per household		Up to 5
Noise Level @ 1 metre ²	dB(A)	52

HEAT PUMP PERFORMANCE SPECIFICATIONS

Ambient air temperature	Recovery rate @ 45°C rise (L/hr)	Average heating capacity (kW)	Coefficient of Performance (COP)
19°C	37	2.0	3.6

AMBIPOWER® 180 HEAT PUMP



AmbiPower® MDc-180 Heat Pump with a 178 litre capacity is recommended for replacement of small to medium electric water heater across all climates.

It is a powerful and efficient Heat Pump with a high Coefficient of Performance (COP) and hot water recovery, making it an ideal choice for smaller families.

FEATURES

- Advanced wrap-around microchannel heating technology for uniform and faster water heating
- Suitable for cold climates with an operating range from -7°C to +43°C
- Suitable for harsh water conditions. Optional blue anode model available
- Can save up to 70% on your water heating energy consumption compared to an electric water heater in Zone 3⁴
- 2.4 kW boost element
- Durable outer shell in coated sheet metal
- LED touchscreen controller provides optimum visibility
- Timer function available
- Manufactured by Rheem³
- Uses LOW GWP R513a refrigerant

MODEL		551D180
Storage capacity	Litres	178
Boost capacity	Litres	168
Rated Heat Pump power input	Watts	683
Element rating	kW	2.4
Recommended electrical circuit	Amps	15
Coefficient of Performance (COP) ¹		4.5
Recommended people per household		Up to 4
Noise Level @ 1 metre ²	dB(A)	48

HEAT PUMP PERFORMANCE SPECIFICATIONS

Ambient air temperature	Recovery rate @ 45°C rise (L/hr)	Average heating capacity (kW)	Coefficient of Performance (COP)
19°C	60	3.1	4.5

1. There is no unified standard to measure COP of a Heat Pump, manufacturers choose their own methods. Rheem measures COP as the average value in the AS/NZS5125 performance test at 19°C ambient temperature over the entire heat-up process. Note that the Noise Level – Rheem measures noise at 1 m from the water heater during a Noise Test conducted to Standard GB/T 23137-2008 in a semi-anechoic chamber within a laboratory. The noise level when installed may be higher due to sound reflections from adjacent walls

AMBIPOWER® 280e HEAT PUMP



AmbiPower® 280e Heat Pump is a ULTRA LOW GWP powerful and efficient Heat Pump with a high Coefficient of Performance (COP), powerful boost element and hot water recovery.

It is an ideal choice for larger families and is recommended for the replacement of medium to large electric water heater across all climates.

FEATURES

- Advanced wrap-around microchannel heating technology for uniform and faster water heating
- Suitable for cold climates with an operating range from -6°C to +43°C
- Suitable for harsh water conditions. Optional blue anode model available
- Can save up to 73.9% on your water heating energy consumption compared to an electric water heater in Zone 3⁴
- 2.4 kW boost element
- Durable outer shell in coated sheet metal design with a painted aluminium top module cover
- LED touchscreen controller provides optimum visibility
- Timer function available
- Manufactured in Australia
- Uses R290 refrigerant with a ULTRA LOW GWP of <3

MODEL	551E280 & 551E280/B	
Storage capacity	Litres	280
Boost capacity	Litres	236
Rated Heat Pump power input	Watts	690
Element rating	kW	2.4
Recommended electrical circuit	Amps	15
Coefficient of Performance (COP) ¹		5.2
Recommended people per household		Up to 6
Noise Level @ 1 metre ²	dB(A)	47

HEAT PUMP PERFORMANCE SPECIFICATIONS

Ambient air temperature	Recovery rate @ 45°C rise (L/hr)	Average heating capacity (kW)	Coefficient of Performance (COP)
19°C	56	2.9	5.2

AMBIHEAT® 270 HEAT PUMP



Ambiheat® HDc-270 Heat Pump is part of the Platinum Series range of Rheem products.

FEATURES

- Advanced wrap around microchannel heating technology for uniform and faster water heating
- Highest recovery range in the Rheem Heat Pump range
- Suitable for cold climates with an operating range from -5°C to +43°C
- Suitable for harsh water conditions. Optional blue anode model available
- Can save up to 73% on your water heating energy consumption compared to an electric water heater in Zone 3⁴
- 2.4 kW boost element
- User-friendly touch screen LED display
- With its durable ABS and ASA top cover, the unit can easily withstand all weather conditions
- Smart LED controller display: A bright interactive LED touchscreen display putting control at your fingertips
- Dual timer function available
- Manufactured in Australia
- Uses LOW GWP R513a refrigerant

MODEL	571D270	
Storage capacity	Litres	270
Boost capacity	Litres	195
Rated Heat Pump power input	Watts	985
Element rating	kW	2.4
Recommended electrical circuit	Amps	15
Coefficient of Performance (COP) ¹		4.5
Recommended people per household		Up to 6
Noise Level @ 1 metre ²	dB(A)	47

HEAT PUMP PERFORMANCE SPECIFICATIONS

Ambient air temperature	Recovery rate @ 45°C rise (L/hr)	Average heating capacity (kW)	Coefficient of Performance (COP)
19°C	77	3.9	4.5

¹ Actual COP of the product at any given time will be impacted by several factors, including the ambient and cold-water inlet temperatures at the place of installation and time of day/season of operation. ² There is no unified standard to measure the noise level of heat pumps. ³ Made by Rheem in China. ⁴ Energy savings are based on Australian Government approved TRNSYS simulation modelling using a medium load in Zone 3 and apply when replacing an electric water heater of similar size.




RENEWABLE HOT WATER NO MATTER IF SUNSHINE, CLOUD OR RAIN

STCs

Small-scale Technology Certificates (STCs) provide a financial incentive to encourage the installation of Solar and Heat Pump water heaters provided under a Federal Government legislated scheme.

This map shows the climate Zones within Australia which will define the number of STCs allocated to an approved Heat Pump water heater. Your installation may be eligible for additional incentives in some states. See website for details.

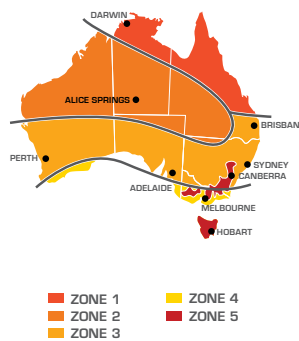

For more information on STCs visit www.rheem.com.au/rheem/help/offers-and-incentives/stcs



Rheem Australia Pty Ltd

Head Office
1 Alan Street,
Rydalmere, NSW 2116
Australia

Postal
PO Box 7508,
Silverwater NSW 2128
Australia

ABN 21 098 823 511

National Sales Phone: 132 552
National Service Phone: 131 031
www.rheem.com.au

®Registered Trade mark of Rheem Australia Pty Ltd.
™ TM Greater Degree of Good is a Rheem Trade mark of Rheem Manufacturing Company
Materials and specifications are subject to change without notice.
© 2024 Rheem Australia Pty Ltd. All rights reserved

For more details and product specific information scan QR Code



A Greater Degree of Good™ represents our global commitment to sustainability.

RHE535-JUN2024-BELONG