




Features & Benefits

- 27 L/min continuous hot water delivery @ 25°C rise
- Remote Temperature Controller options for added convenience and safety
- 50°C models available (876627), requiring no tempering valve³
- Digital display for easy fault diagnosis
- Natural gas & Propane models
- 10 year heat exchanger warranty¹

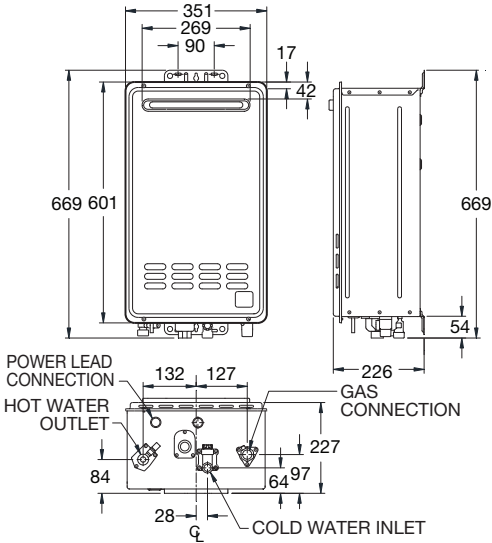

MODEL	876627 874627
Min. Operating Flow rate (L/min)	2.0
Nom. Gas Consumption (MJ/hr)	205
Max Water Supply Pressure (kPa)	1000
Min Water Supply Pressure (kPa)	140
Water Connections	R 3/4
Gas Connection	R 3/4
Approx. Weight (Empty) kg	23



Scan code for details & installation instructions

