



Series 1031

Zetco WaterMarked
& AGA Approved
DZR Brass Ball Valve
Flare x Flare

FEATURES

MANUFACTURED IN ITALY

FULL BORE

WATERMARKED TO ATS 5200.012 LICENCE WMKA00110

AUSTRALIAN GAS ASSOCIATION APPROVAL #5301

BLOW-OUT PROOF STEM

ASSORTED HANDLE COLOURS AVAILABLE

MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION

ALL VALVES PRESSURE TESTED DURING PRODUCTION

SIZE RANGE: 15MM TO 20MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 99°C

MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES:

FLUIDS 2500 kPa

FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF

GAS 2100 kPa



AGA 5301
AS 4617



WaterMark


LN WMKA00110
ATS 5200.012

Series 1031

Zetco WaterMarked & AGA Approved
DZR Brass Ball Valve Flare x Flare



DIMENSIONAL AND COMPONENT DIAGRAM

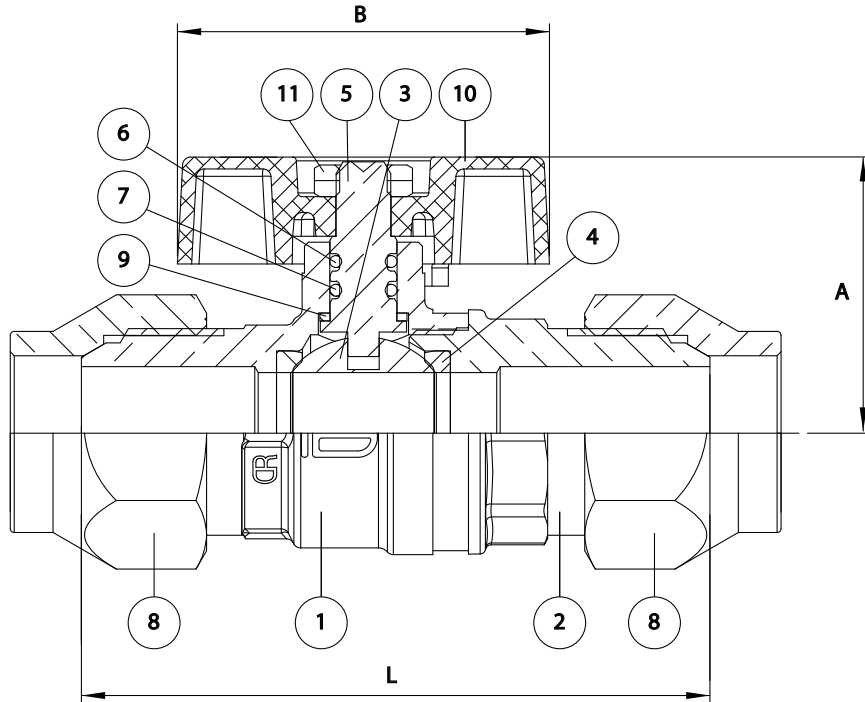

MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	DZR BRASS (CHROME PLATED)
4	SEAL	PTFE
5	STEM	DZR BRASS
6	UPPER O-RING	HNBR
7	LOWER O-RING	EPDM PEROXIDE
8	NUT	BRASS
9	THRUST WASHER	PTFE
10	HANDLE	POWDER COATED ALUMINIUM
11	NUT	ZINC PLATED STEEL

DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
1031015	15	30.8	47	67.5	11	0.225
1031020	20	34.7	47	79.4	20	0.360

PRESSURE/TEMPERATURE DIAGRAM

