



Series 1205

Zetco AGA Approved
Gas Cock BSP Flare

FEATURES

MANUFACTURED IN ITALY

FULL BORE

AUSTRALIAN GAS ASSOCIATION APPROVAL #5301

BLOW-OUT PROOF STEM

MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION

ALL VALVES PRESSURE TESTED DURING PRODUCTION

SIZE RANGE: 10MM TO 20MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 99°C

MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES:

FLUIDS 2500 kPa

FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF

GAS 2100 kPa




AGA 5301
AS 4617

Series 1205

Zetco AGA Approved Gas Cock BSP Flare



DIMENSIONAL AND COMPONENT DIAGRAM

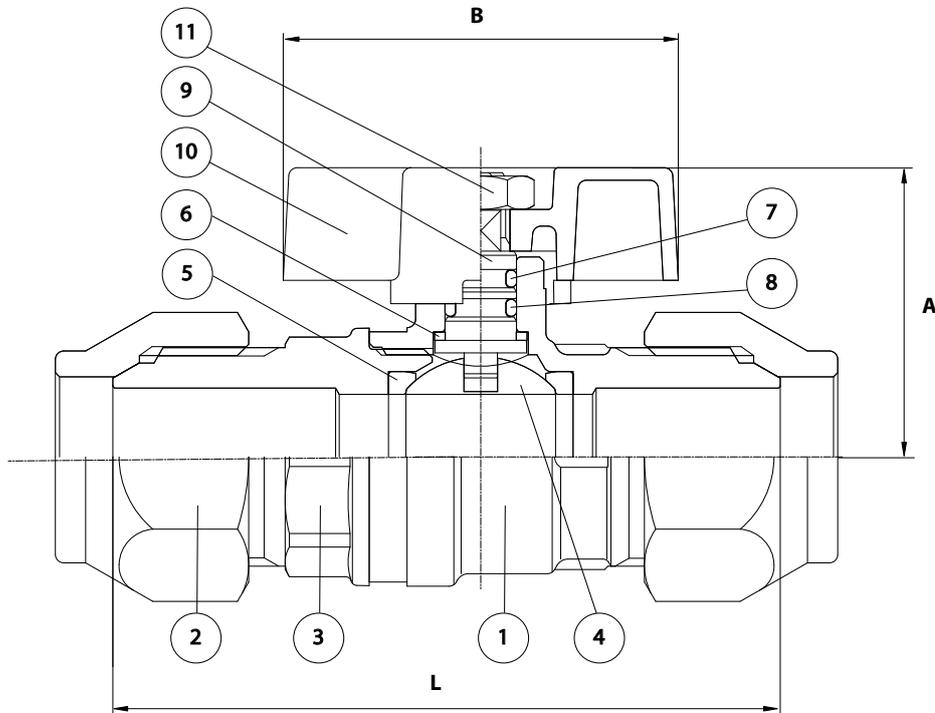

MATERIALS

| POS. | PART NAME | MATERIALS |
|------|---------------|-------------------------|
| 1 | BODY | BRASS |
| 2 | NUT | BRASS |
| 3 | END ADAPTOR | BRASS |
| 4 | BALL | BRASS (CHROME PLATED) |
| 5 | SEAL | PTFE |
| 6 | THRUST WASHER | PTFE |
| 7 | UPPER O-RING | HNBR |
| 8 | LOWER O-RING | EPDM PEROXIDE |
| 9 | STEM | BRASS |
| 10 | HANDLE | POWDER COATED ALUMINIUM |
| 11 | NUT | ZINC PLATED STEEL |

DIMENSIONS - mm

| Prod. Code | Size | A | B | L | Kv | Wgt kg |
|------------|------|----|----|------|----|--------|
| 1205010 | 10 | 31 | 47 | 66.5 | 11 | 0.180 |
| 1205015 | 15 | 31 | 47 | 67.5 | 11 | 0.205 |
| 1205020 | 20 | 35 | 47 | 88.6 | 20 | 0.458 |

PRESSURE/TEMPERATURE DIAGRAM

