



Series 1907

Eurostop® DZR Brass
WaterMarked Spring
Check Valve

FEATURES

MANUFACTURED IN ITALY
WATERMARKED TO AS 1628 LICENCE WM-020106
MINIMUM HEAD LOSS DUE TO THE STREAMLINED FLOW DESIGN
HEAVY PATTERN DESIGN
EXCELLENT SEAL AT LOW & HIGH PRESSURE, WITHIN A WIDE TEMPERATURE RANGE
NOT SUITABLE FOR SOLAR APPLICATIONS
QUIET OPERATION AND REDUCTION IN WATER HAMMER
WEAR RESISTANT AND LONG LASTING MATERIALS
COMPACT DIMENSIONS, SUPERIOR PERFORMANCE AND HIGH QUALITY
CAN BE INSTALLED IN HORIZONTAL OR VERTICAL POSITION
ALL VALVES PRESSURE TESTED DURING PRODUCTION
SIZE RANGE: 15MM TO 100MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 130°C
MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES: 1600 kPa
CRACKING PRESSURE: 2.5 kPa

BIM-MED^{AUS}




WaterMark
IAPMO WM-020106
AS 1628

Series 1907

Eurostop® DZR Brass WaterMarked
Spring Check Valve



DIMENSIONAL AND COMPONENT DIAGRAM

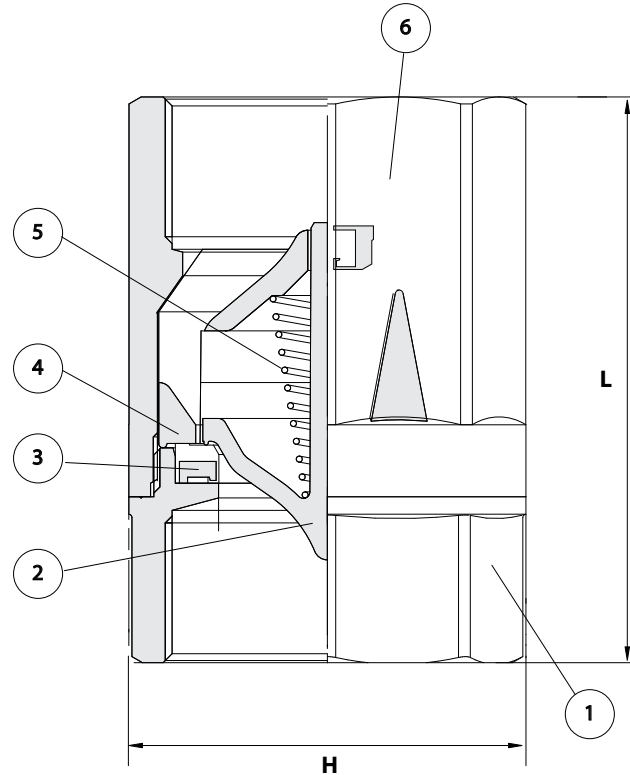

MATERIALS

POS.	PART NAME	MATERIALS
1	ADAPTOR	DZR BRASS
2	JUMPER	MOULDED PLASTIC
3	GASKET	VITON®
4	JUMPER GUIDE	MOULDED PLASTIC
5	SPRING	STAINLESS STEEL 316
6	BODY	DZR BRASS

DIMENSIONS - mm

Prod. Code	Size	L	H	Kv	Wgt kg
1907015	15	56	34.5	8.4	0.135
1907020	20	60	34.5	8.4	0.161
1907025	25	68	41.5	13.5	0.263
1907032	32	78	51	19.3	0.434
1907040	40	84.5	60	33.0	0.666
1907050	50	104	73	48.5	1.09
1907065	65	121.5	92	71.0	1.91
1907080	80	144	116.5	103.0	3.07
1907100	100	172	142	165.0	5.22