


ELBOW C×M

Brand Name: **elson**

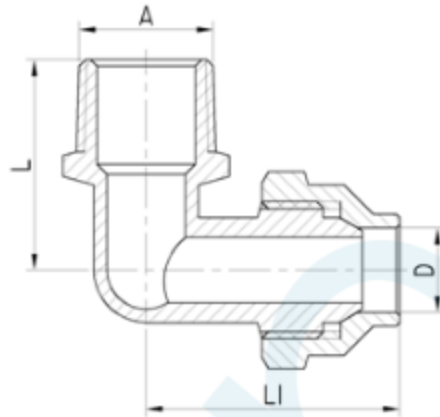

CODE	DESCRIPTION	L(mm)	L1(mm)	D	A
85458	ELBOW CxM 15mm FL x 10mm MI BRS	28	37.8	DN15	R3/8
85461	ELBOW CxM 15mm FL x 15mm MI CP	32	38.8	DN15	R1/2
85462	ELBOW CxM 15mm FL x 15mm MI BRS	32	38.8	DN15	R1/2
85463	ELBOW CxM 20mm FL x 20mm MI CP	38.4	44.2	DN20	R3/4
85464	ELBOW CxM 20mm FL x 20mm MI BRS	38.4	44.2	DN20	R3/4
85466	ELBOW CxM 15mm FL x 20mm MI BRS	37	39.8	DN15	R3/4
85470	ELBOW CxM 25mm FL x 25mm MI BRS	47	57.2	DN25	R1/2

Product Specification & Features

- Maximum Working Temperature: 95°C
- Maximum Working Pressure at 20°C : Water-2000Kpa, Gas-500KPa
- Threads: Complies with AS ISO 7.1, AS ISO 7.2 and AS 1722.2
- Material: DR Brass, Complies with AS 2345
- Suitable for Potable Water – complies with AS/NZS 4020



Elson Australasia Pty Ltd

Tel: 02 9625 7899 Fax: 02 9625 7855

Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0

Nov. 2020