



1 Slide the Soap Dish and the Shower Holder onto the Tube.

Attached Mounting Brackets onto the Tube.

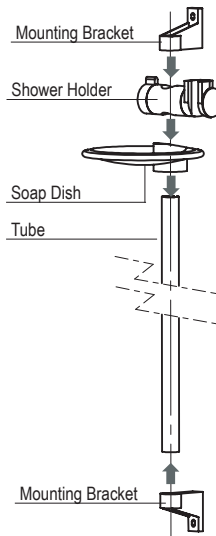

2 Place the Rise Assembly to disired position on the wall.


Mark hole position with a pencil.

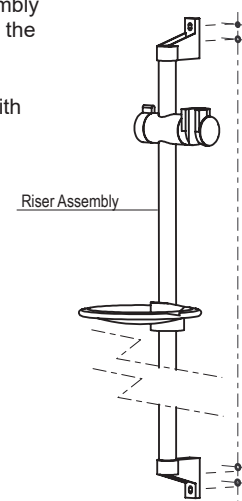


3 Drill mounting holes with 6mm drill bit.

Push Wall Plugs into holes.

Fasten Screws to fix Riser Assembly to position.

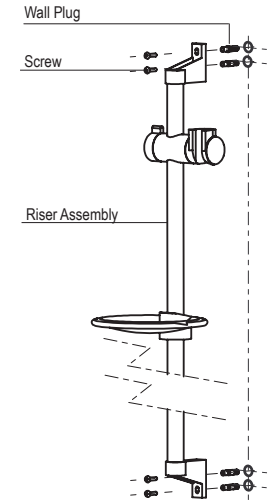


4 Push Dress Covers onto Riser Assembly.

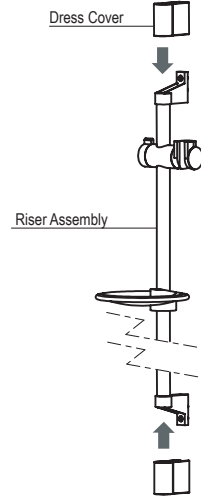


5 Apply teflon tape to Water Outlet thread.

Fasten Adaptor onto Water Outlet thread.

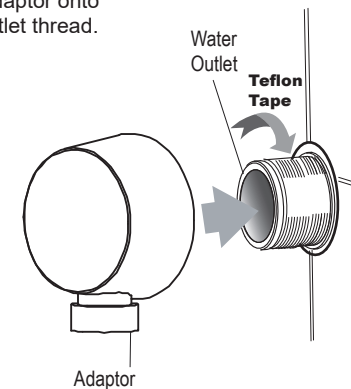

6 Ensure Rubber Washers and Check Valve are in places.

Connect Adaptor and Hand Shower with PVC hose.

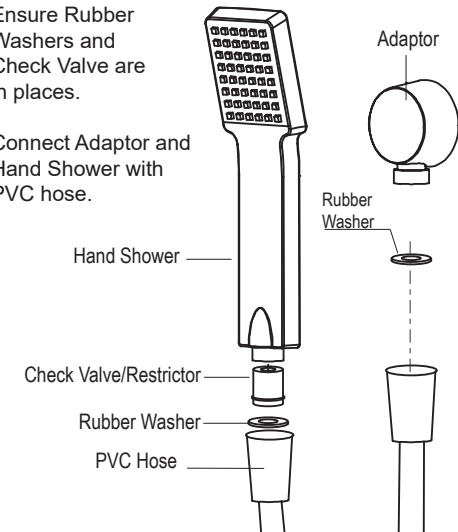

recommended working pressure
150-500 KPa



maximum hot water temperature
75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.
- Showers may not be suitable for use within:
 - Gravity-fed water systems
 - Some instantaneous hot water systems; or

- Pressure supply less than 150kPa;
 NOTE: After installing this product, retighten the flow controller housing to prevent removal by hand.

Failure to comply with the above may void all warranties.

WARRANTY:

Please refer to the full warranty statement enclosed with the product before installing. Or visit www.phoenixtapware.com.au to download a copy.

MAINTENANCE AND CARE:

- Products should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, Phoenix Tapware reserves the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

This product is suitable for all construction methods; Timber; brick, rammed earth etc - Provided it is installed to the guidelines specified in this instruction.

*All measurements are shown in millimeters.