


1

a) Measure and mark desired mounting positions.

b) Drill mounting holes with 6mm drill bit.

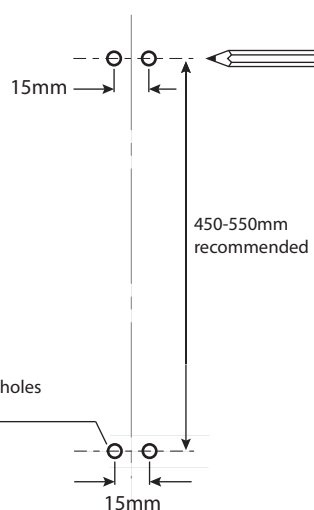


6mm diameter holes
32mm deep

15mm

450-550mm recommended

2

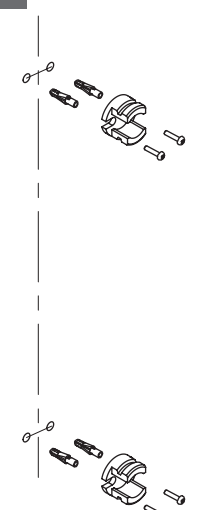


a) Push Wall Plugs into each 6mm hole.

b) Locate mounting adaptors over holes and firmly screw in place.

3

a) Place Slider onto the tube.

b) Slide Soap Dish onto the tube and fasten into place using the grub screw with the allen key provided.

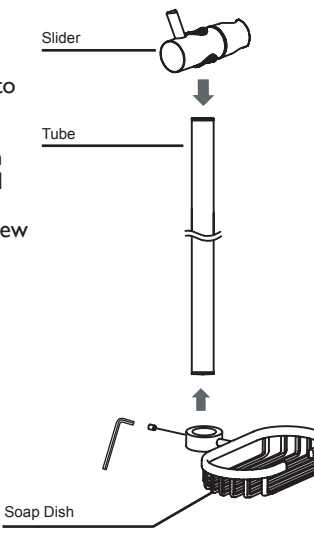

Slider


Tube

Soap Dish

4

a) Slide the Tube into Top Holder. Then fit Bottom Holder over mounting adaptor.

b) Secure both Holders by fastening grub screws using the allen key provided.

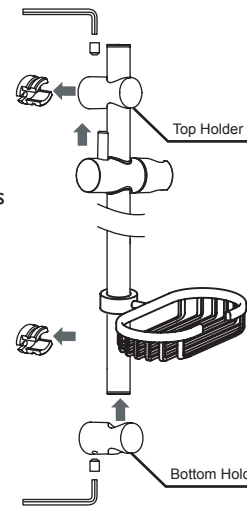


Top Holder

Bottom Holder

5

a) Apply teflon tape to Water Outlet thread.

b) Fasten Adaptor onto Water Outlet thread.

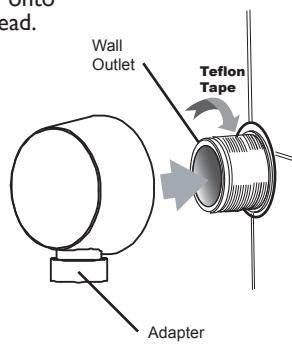

Water Outlet

Teflon Tape


Adaptor

6

a) Ensure Rubber Washers and Flow Restrictor are in place as shown.

b) Carefully screw Hose to Adaptor, ensuring flow restrictor is not damaged in the process.

c) Screw Hand Shower to Hose, tighten firmly.

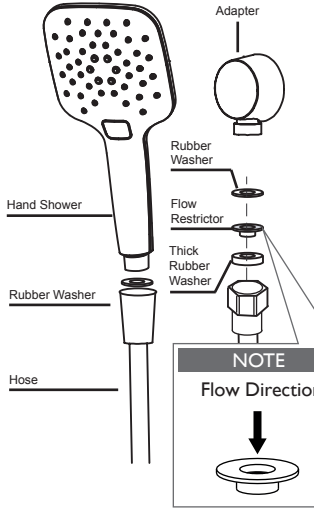

Adapter

Rubber Washer

Flow Restrictor


Thick Rubber Washer

Hand Shower


Rubber Washer

Hose

NOTE
Flow Direction



recommended working pressure
150-500 KPa



maximum hot water temperature
75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.

Showers may not be suitable for use within:

- Gravity-fed water systems
- Some instantaneous hot water systems; or

- Pressure supply less than 150kPa;

NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

Failure to comply with the above may void all warranties.

WARRANTY:
Please refer to the full warranty statement enclosed with the product before installing. Or visit www.phoenixtapware.com.au to download a copy.

MAINTENANCE AND CARE:

- Products should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, Phoenix Tapware reserves the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.

(03) 9780 4200
www.phoenixtapware.com.au